



**Aireon (A)**

with Modern Rosette

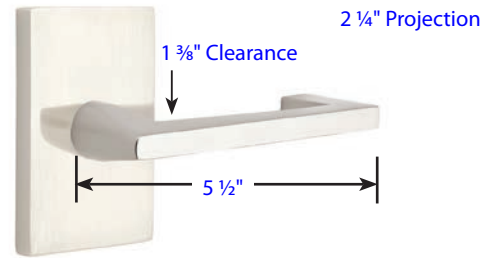


**Argos (AG)**

with Modern Rectangular Rosette

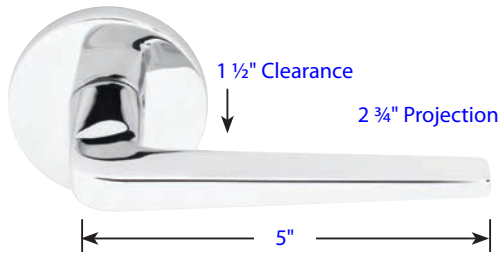


**Athena (ATN)**

with Disk Rosette

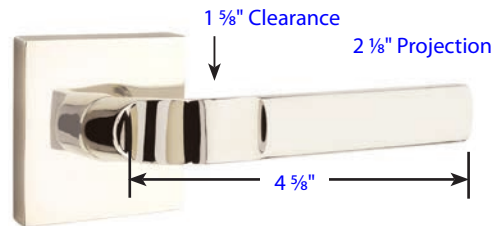


**Aston (AST)**

with Square Rosette

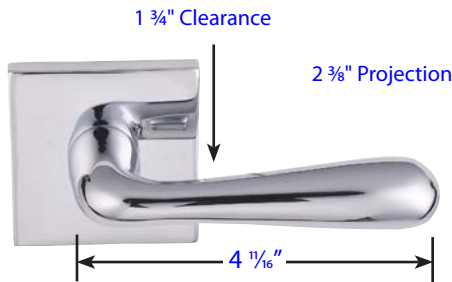

**Basel (BA)**

with Square Rosette

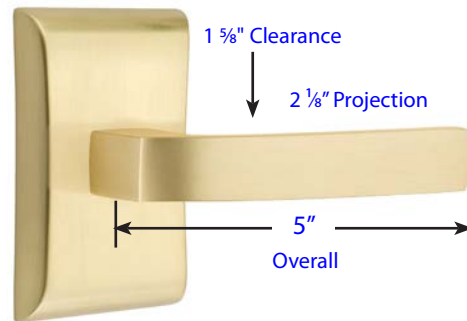

**Breslin (BRL)**

with Neos Rosette

See page 4 for rosette specification.

**Door Thickness Specifications**

- Standard Door Thickness: 1 1/4" - 2"
- Standard Components:
- Privacy Pin (for privacy sets)
- Inside Passage Half Spindle
- 1 1/2" Rosette Screws
- Full-Lip Strike Plate

- **Extended** Door Thickness: 2" - 2 1/2"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Long Inside Passage Half Spindle
- 2" Rosette Screws
- Extended Full-Lip Strike Plate

- **Extended** Door Thickness: 2 1/2" - 3"
- Extended Components:
- Privacy Pin w/ Extension (for privacy sets)
- Extra Long Inside Passage Half Spindle
- 2 1/2" Rosette Screws
- Extended Full-Lip Strike Plate