


GENERAL SPECIFICATIONS

PRODUCT CATEGORY	CYLINDER		STRIKES		FACEPLATES		DOOR HANDING	ADA	ANSI	UL	BORING REQUIREMENTS				DOOR THICKNESS		BACKSET	LATCH BOLT THROW	
	STANDARD	OPTIONAL	DEADBOLT	HANDLE	STANDARD	OPTIONAL					CROSS BORE		EDGE BORE	LATCH FACE	STANDARD	SPECIAL		DEADBOLT	HANDLE
											DEADBOLT	HANDLE							
Handlesets	5 Pin Weslock Keyway	5 Pin Schlage C or Kwikset Keyway	2-1/4" full lip and 1" x 2-1/4", Radius & Square	2-1/4" full lip, Radius & Square	1" x 2-1/4", Removable Radius & Square	Drive-in 1" x 2-1/4", Removable Radius & Square	Specify handing on all Tramore functions and on all interior packs with handed levers.	N/A	A 156.2 Grade II	N/A	2-1/8" or 1-5/8"	2-1/8"	1"	1" x 2-1/4"	1-3/4" - 2"	2" - 2-1/4"	Adjustable 2-3/8" or 2-3/4"	1" (2 Hardened Steel Rollers)	1/2"
Knobs	5 Pin Weslock Keyway	5 Pin Schlage C or Kwikset Keyway	2-1/4" full lip, Radius & Square		1" x 2-1/4", Removable Radius & Square	Drive-in 1" x 2-1/4", Removable Radius & Square	Specify handing for Sutton style (except dummy function), all other styles are reversible for right or left-hand doors	N/A	A 156.2 Grade II	N/A	2-1/8"		1"	1" x 2-1/4"	1-3/8" - 1-3/4"	1-3/4" - 2-1/4"	Adjustable 2-3/8" or 2-3/4"	1/2"	
Levers	5 Pin Weslock Keyway	5 Pin Schlage C or Kwikset Keyway	2-1/4" full lip, Radius & Square		1" x 2-1/4", Removable Radius & Square	Drive-in 1" x 2-1/4", Removable Radius & Square	Specify handing for Carlow levers and all Sutton functions, all other styles are reversible for right or left-hand doors	All Functions Meet Sec. 4.13.9	A 156.2 Grade II	N/A	2-1/8"		1"	1" x 2-1/4"	1-3/8" - 1-3/4"	1-3/4" - 2-1/4"	Adjustable 2-3/8" or 2-3/4"	1/2"	
Deadbolts	5 Pin Weslock Keyway	5 Pin Schlage C or Kwikset Keyway	1" x 2-1/4", Radius & Square		1" x 2-1/4", Removable Radius & Square	Drive-in 1" x 2-1/4", Removable Radius & Square	Reversible for right or left-hand doors	N/A	A 156.2 Grade II	N/A	2-1/8" or 1-5/8"		1"	1" x 2-1/4"	1-3/8" - 1-3/4"	1-3/4" - 2-1/4"	Adjustable 2-3/8" or 2-3/4"	1" (2 Hardened Steel Rollers)	


ENTRY HANDLES

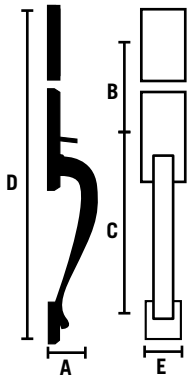

MODEL		A	B	C	D	E
Castletown	Exterior	2-3/4"	*5-1/2"	9-1/4"	18-1/2"	2-3/4"
Stonebriar	Interior	2-3/4"	5-1/2"	-	10-1/8"	2-3/4"
	Exterior	2-3/4"	5-1/2"	9-1/4"	18-1/2"	2-3/4"
Tramore	Interior	2-3/4"	5-1/2"	-	10-1/8"	2-3/4"
	Exterior	2-3/4"	5-1/2"	-	10-3/16"	2-3/4"
Wiltshire	Interior	2-3/4"	5-1/2"	-	18-1/2"	2-3/4"
	Exterior	2-3/4"	5-1/2"	9-1/4"	19-1/4"	2-3/4"
Aspen	Exterior	2-3/4"	*5-1/2"	9-1/4"	18-1/2"	2-3/4"
Greystone	Interior	2-3/4"	5-1/2"	-	10-1/8"	2-3/4"
	Exterior	2-3/4"	5-1/2"	9-1/4"	18-1/2"	2-3/4"
Rockford	Interior	2-3/4"	5-1/2"	-	10-1/8"	2-3/4"
	Exterior	2-3/4"	5-1/2"	9-1/4"	18-1/2"	2-3/4"


*5-1/4" minimum

KNOBS




MODEL	A	B	C	D	E
Wexford Premiere	2-1/2"	-	-	5"	2-3/4"
Wexford Square	2-1/2"	-	-	5"	2-3/4"
Wexford Sutton	2-1/2"	-	-	7-5/8"	2-3/4"
Durham Premiere	2-1/2"	-	-	5"	2-3/4"
Durham Square	2-1/2"	-	-	5"	2-3/4"
Durham Sutton	2-1/2"	-	-	7-5/8"	2-3/4"

LEVERS

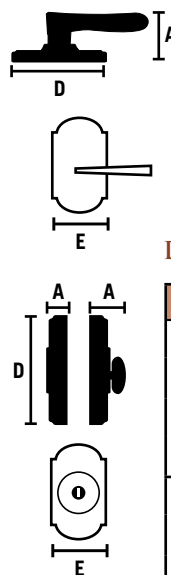

MODEL	A	B	C	D	E
Carlow Premiere	2-1/2"	-	-	5"	2-3/4"
Carlow Square	2-1/2"	-	-	5"	2-3/4"
Carlow Sutton	2-1/2"	-	-	7-5/8"	2-3/4"
Monaghan Square	2-3/4"	-	-	5"	2-3/4"

DEADBOLTS



MODEL	A	B	C	D	E	
PREMIERE Single Cylinder	Interior	1-3/4"	-	-	4"	2-3/4"
	Exterior	3/4"	-	-	4"	2-3/4"
7572 Double Cylinder	Interior	3/4"	-	-	4"	2-3/4"
	Exterior	3/4"	-	-	4"	2-3/4"
7971 Single Cylinder	Interior	1-3/4"	-	-	4"	2-3/4"
	Exterior	3/4"	-	-	4"	2-3/4"
7972 Double Cylinder	Interior	3/4"	-	-	4"	2-3/4"
	Exterior	3/4"	-	-	4"	2-3/4"

CLASSIFICATION KEY

- A - Projection from Door
- B - Center to Center
- C - Footscrew
- D - Full Length
- E - Width of Rose (Escutcheon Plate)