


GENERAL SPECIFICATIONS

| PRODUCT CATEGORY | CYLINDER | | STRIKES | | FACEPLATES | | DOOR HANDING | ADA | ANSI | UL | BORING REQUIREMENTS | | | | DOOR THICKNESS | | BACKSET | LATCH BOLT THROW | |
|------------------|----------------------|-----------------------------------|--|----------------------------------|--|---|--|--------------------------------|------------------|-----|---------------------|--------|-----------|-------------|-----------------|-----------------|-----------------------------|-------------------------------|--------|
| | STANDARD | OPTIONAL | DEADBOLT | HANDLE | STANDARD | OPTIONAL | | | | | CROSS BORE | | EDGE BORE | LATCH FACE | STANDARD | SPECIAL | | DEADBOLT | HANDLE |
| | | | | | | | | | | | DEADBOLT | HANDLE | | | | | | | |
| Handlesets | 5 Pin Weslock Keyway | 5 Pin Schlage C or Kwikset Keyway | 2-1/4" full lip and 1" x 2-1/4", Radius & Square | 2-1/4" full lip, Radius & Square | 1" x 2-1/4", Removable Radius & Square | Drive-in 1" x 2-1/4", Removable Radius & Square | Specify handing on all Tramore functions and on all interior packs with handed levers. | N/A | A 156.2 Grade II | N/A | 2-1/8" or 1-5/8" | 2-1/8" | 1" | 1" x 2-1/4" | 1-3/4" - 2" | 2" - 2-1/4" | Adjustable 2-3/8" or 2-3/4" | 1" (2 Hardened Steel Rollers) | 1/2" |
| Knobs | 5 Pin Weslock Keyway | 5 Pin Schlage C or Kwikset Keyway | 2-1/4" full lip, Radius & Square | | 1" x 2-1/4", Removable Radius & Square | Drive-in 1" x 2-1/4", Removable Radius & Square | Specify handing for Sutton style (except dummy function), all other styles are reversible for right or left-hand doors | N/A | A 156.2 Grade II | N/A | 2-1/8" | | 1" | 1" x 2-1/4" | 1-3/8" - 1-3/4" | 1-3/4" - 2-1/4" | Adjustable 2-3/8" or 2-3/4" | | 1/2" |
| Levers | 5 Pin Weslock Keyway | 5 Pin Schlage C or Kwikset Keyway | 2-1/4" full lip, Radius & Square | | 1" x 2-1/4", Removable Radius & Square | Drive-in 1" x 2-1/4", Removable Radius & Square | Specify handing for Carlow levers and all Sutton functions, all other styles are reversible for right or left-hand doors | All Functions Meet Sec. 4.13.9 | A 156.2 Grade II | N/A | 2-1/8" | | 1" | 1" x 2-1/4" | 1-3/8" - 1-3/4" | 1-3/4" - 2-1/4" | Adjustable 2-3/8" or 2-3/4" | | 1/2" |
| Deadbolts | 5 Pin Weslock Keyway | 5 Pin Schlage C or Kwikset Keyway | 1" x 2-1/4", Radius & Square | | 1" x 2-1/4", Removable Radius & Square | Drive-in 1" x 2-1/4", Removable Radius & Square | Reversible for right or left-hand doors | N/A | A 156.2 Grade II | N/A | 2-1/8" or 1-5/8" | | 1" | 1" x 2-1/4" | 1-3/8" - 1-3/4" | 1-3/4" - 2-1/4" | Adjustable 2-3/8" or 2-3/4" | 1" (2 Hardened Steel Rollers) | |


ENTRY HANDLES

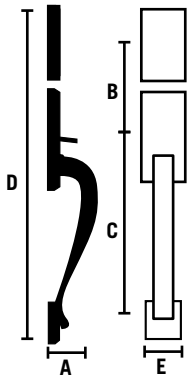

| MODEL | | A | B | C | D | E |
|------------|----------|--------|---------|--------|----------|--------|
| Castletown | Exterior | 2-3/4" | *5-1/2" | 9-1/4" | 18-1/2" | 2-3/4" |
| Stonebriar | Interior | 2-3/4" | 5-1/2" | - | 10-1/8" | 2-3/4" |
| | Exterior | 2-3/4" | 5-1/2" | 9-1/4" | 18-1/2" | 2-3/4" |
| Tramore | Interior | 2-3/4" | 5-1/2" | - | 10-1/8" | 2-3/4" |
| | Exterior | 2-3/4" | 5-1/2" | - | 10-3/16" | 2-3/4" |
| Wiltshire | Interior | 2-3/4" | 5-1/2" | - | 18-1/2" | 2-3/4" |
| | Exterior | 2-3/4" | 5-1/2" | 9-1/4" | 19-1/4" | 2-3/4" |
| Aspen | Exterior | 2-3/4" | *5-1/2" | 9-1/4" | 18-1/2" | 2-3/4" |
| Greystone | Interior | 2-3/4" | 5-1/2" | - | 10-1/8" | 2-3/4" |
| | Exterior | 2-3/4" | 5-1/2" | 9-1/4" | 18-1/2" | 2-3/4" |
| Rockford | Interior | 2-3/4" | 5-1/2" | - | 10-1/8" | 2-3/4" |
| | Exterior | 2-3/4" | 5-1/2" | 9-1/4" | 18-1/2" | 2-3/4" |


*5-1/4" minimum

KNOBS




| MODEL | A | B | C | D | E |
|------------------|--------|---|---|--------|--------|
| Wexford Premiere | 2-1/2" | - | - | 5" | 2-3/4" |
| Wexford Square | 2-1/2" | - | - | 5" | 2-3/4" |
| Wexford Sutton | 2-1/2" | - | - | 7-5/8" | 2-3/4" |
| Durham Premiere | 2-1/2" | - | - | 5" | 2-3/4" |
| Durham Square | 2-1/2" | - | - | 5" | 2-3/4" |
| Durham Sutton | 2-1/2" | - | - | 7-5/8" | 2-3/4" |

LEVERS

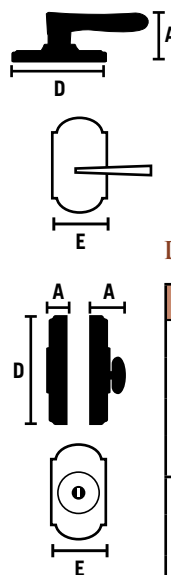

| MODEL | A | B | C | D | E |
|-----------------|--------|---|---|--------|--------|
| Carlow Premiere | 2-1/2" | - | - | 5" | 2-3/4" |
| Carlow Square | 2-1/2" | - | - | 5" | 2-3/4" |
| Carlow Sutton | 2-1/2" | - | - | 7-5/8" | 2-3/4" |
| Monaghan Square | 2-3/4" | - | - | 5" | 2-3/4" |

DEADBOLTS



| MODEL | A | B | C | D | E | |
|--------------------------|----------|--------|---|---|----|--------|
| PREMIERE Single Cylinder | Interior | 1-3/4" | - | - | 4" | 2-3/4" |
| | Exterior | 3/4" | - | - | 4" | 2-3/4" |
| 7572 Double Cylinder | Interior | 3/4" | - | - | 4" | 2-3/4" |
| | Exterior | 3/4" | - | - | 4" | 2-3/4" |
| SQUARE Single Cylinder | Interior | 1-3/4" | - | - | 4" | 2-3/4" |
| | Exterior | 3/4" | - | - | 4" | 2-3/4" |
| 7972 Double Cylinder | Interior | 3/4" | - | - | 4" | 2-3/4" |
| | Exterior | 3/4" | - | - | 4" | 2-3/4" |

CLASSIFICATION KEY

- A - Projection from Door
- B - Center to Center
- C - Footscrew
- D - Full Length
- E - Width of Rose (Escutcheon Plate)