


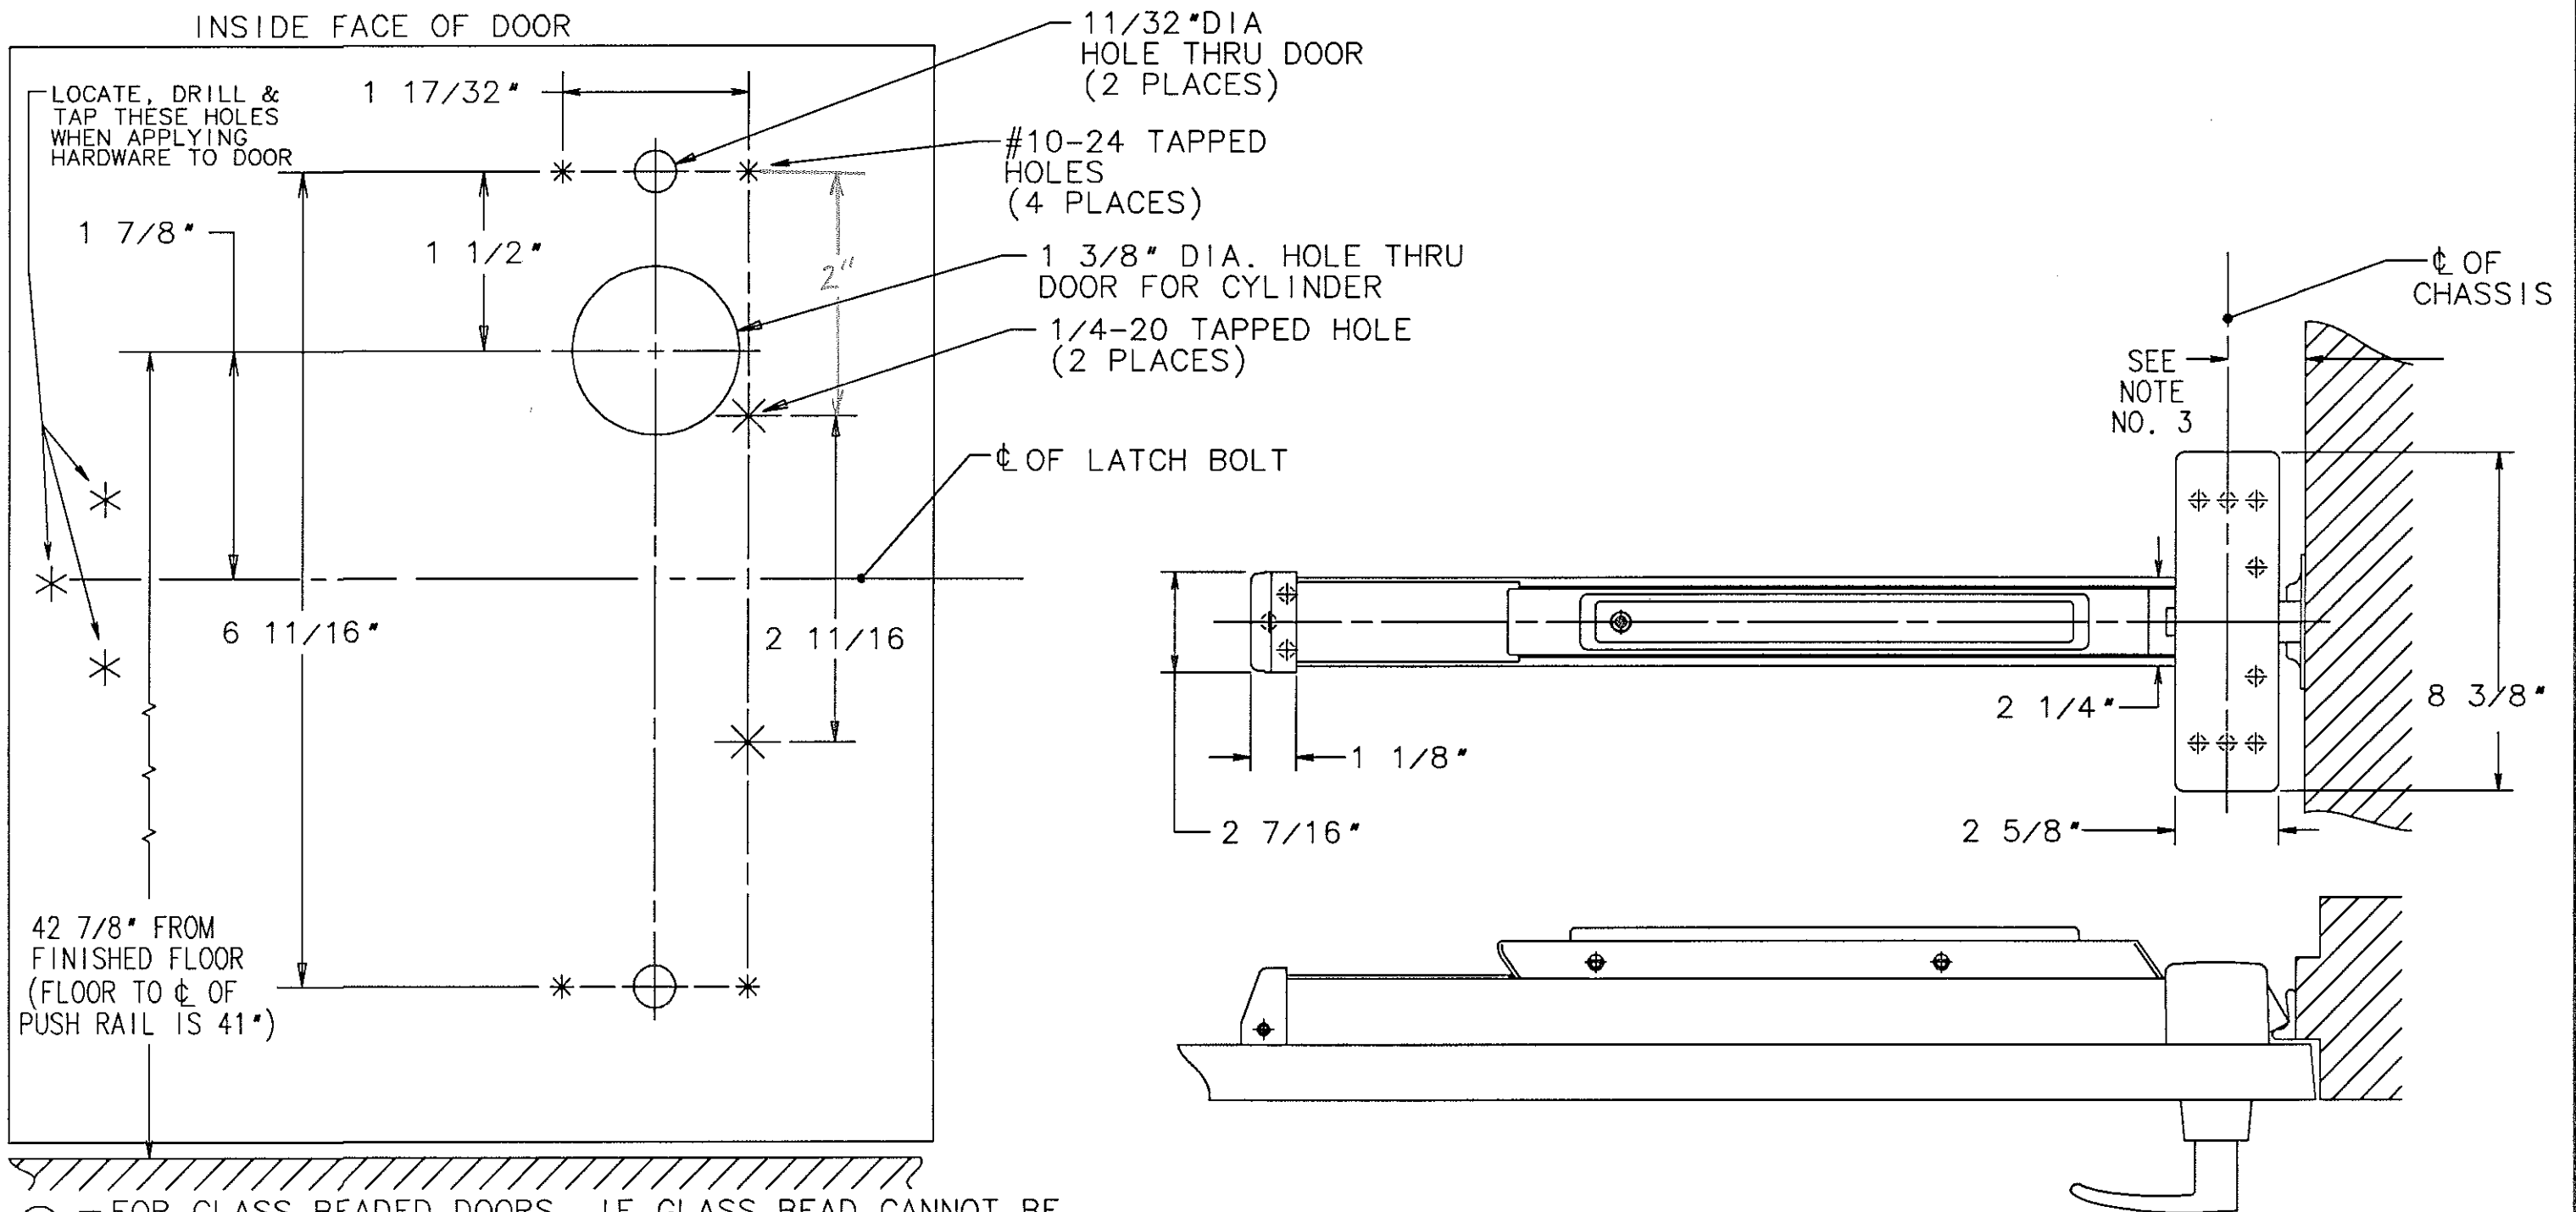

- ⑦— FOR GLASS BEADED DOORS, IF GLASS BEAD CANNOT BE REMOVED, USE GLASS BEAD SHIM KIT (AVAILABLE ON ORDER).
- ⑥— FOR OUTSIDE TRIM SEE TEMPLATE NO. 4414.
- ⑤— SURFACE OF DOOR WHERE EXIT DEVICE IS TO BE APPLIED MUST BE FLUSH.
- ④— SEE MASTER SHEET No. 4019 FOR AREAS REQUIRING REINFORCEMENTS.
- ③— FOR MOUNTING LOCATION SEE STRIKE TEMPLATE #4300 (649 STANDARD STRIKE) FOR HC8800 AND 12-HC8800 SERIES EXIT DEVICES
- ②— WE RECOMMEND THAT ALL TAPPED HOLES BE DRILLED & TAPPED IN FIELD.
- ①— TOLERANCE ON ALL DIMENSIONS $\pm 1/64"$.

SARGENT® Manufacturing Company
100 Sargent Drive New Haven, CT 06511

TEMPLATE: HC8800 & 12-HC8800
RIM TYPE EXIT DEVICE FOR
USE WITH 704 X 710 &
744 x 740 ET CONTROL

RELEASE DATE
26 JAN 01
TEMPLT NO.
4465 C